Mini Converter SDI Distribution 4K



When you need to connect to multiple SDI devices, then Mini Converter SDI Distribution 4K is the perfect solution! Connect a single SDI source to 8 re-clocked SDI outputs with automatic switching between all SD-SDI, HD-SDI, 3G-SDI and 6G-SDI video formats, plus all ASI, ancillary and embedded audio formats.

$409

Connections

SDI Video Inputs
Switchable between SD, HD and 6G-SDI.

SDI Video Outputs
8 outputs automatically match the SDI video input.

Reclocking
Yes

Multi Rate Support
Auto detection of SD, HD or 6G-SDI.

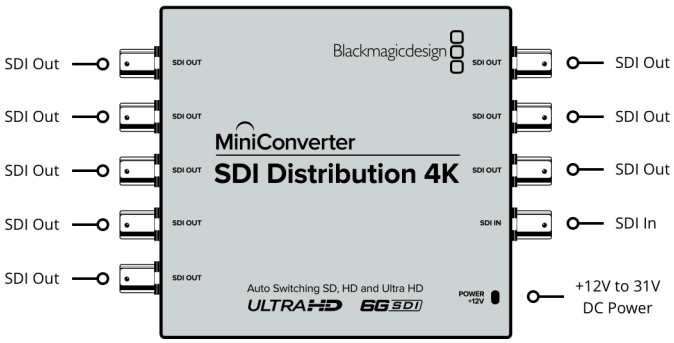

Standards

SD Video Standards
525i59.94 NTSC, 625i50 PAL

HD Video Standards
720p50, 720p59.94, 720p60, 1080i50, 1080i59.94, 1080i60, 1080p23.98, 1080PsF23.98, 1080p24, 1080PsF24, 1080p25, 1080PsF25, 1080p29.97, 1080PsF29.97, 1080p30, 1080PsF30, 1080p50, 1080p59.94, 1080p60

2K Video Standards
2K DCI 23.98p, 2K DCI 24p, 2K DCI 25p, 2K DCI 23.98PsF, 2K DCI 24PsF, 2K DCI 25PsF

Ultra HD Video Standards
2160p23.98, 2160p24, 2160p25, 2160p29.97, 2160p30

4K Video Standards
4K DCI 23.98p, 4K DCI 24p, 4K DCI 25p

SDI Compliance
SMPTE 259M, SMPTE 292M, SMPTE 296M, SMPTE 372M, SMPTE ST-2081, ITU-R BT.656 and ITU-R BT.601

SDI Video Rates
SDI video inputs are automatically detected between standard definition and high definition.

SDI Video Sampling
4:2:2 and 4:4:4

SDI Audio Sampling
Television standard sample rate of 48 kHz and 24 bit.

SDI Color Precision
4:2:2 and 4:4:4

SDI Color Space
YUV and RGB

SDI Auto Switching
Automatically detects SD, HD or 6G-SDI.

ASI Support
Yes

Power Requirements

Power Supply
+12V universal power supply included with international socket adapters for most countries. Cable tie point.

Power Consumption
4.80 Watts

Operational Voltage Range
12 - 31V DC

Operating Systems



Mac 10.15 Catalina,
Mac 11.1 Big Sur or later.



Windows 10, 64-bit.

Physical Specifications



Environmental Specifications

Operating temperature
0° to 40° C (32° to 104° F)

Storage temperature
-20° to 45° C (-4° to 113° F)

Relative Humidity
0% to 90% non-condensing

What's Included

Mini Converter SDI Distribution 4K
12V universal power supply with international socket adapters

Warranty

3 Year Limited Manufacturer’s Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2026, all rights reserved. All trademarks are property of their respective owners. MSRP includes duties, but excludes sales tax and shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. Privacy Policy

Blackmagic Design Authorized Reseller